

## 2314WL

### Tissue Tape

无纺布胶带

#### Technical Data: 产品说明书

#### ● Product Description:

##### 产品介绍

2314WL is a tissue tape with resin adhesive double coated. It has a very high level of initial tack and good adhesion to a wide variety of surfaces.

2314L是一款双面涂胶的无纺布胶带。产品具有很高的初粘力，对各类材质表面都有良好的粘性。

#### ● Key Features:

##### 特点

Excellent initial adhesion.

具有极好的初粘力。

Excellent resistance to high temperature.

具有极好的耐高温性能。

Good adhesion to film and plastic materials.

对膜材、塑料等都有好的粘性。

#### ● Application Ideas:


##### 应用

Adhesive to MARK, film power switch, foam materials, fabric materials as well as plastic materials.

可用于粘贴标识、薄膜开关、泡棉、纺织材料和塑料材质。

#### ● Construction:

##### 结构

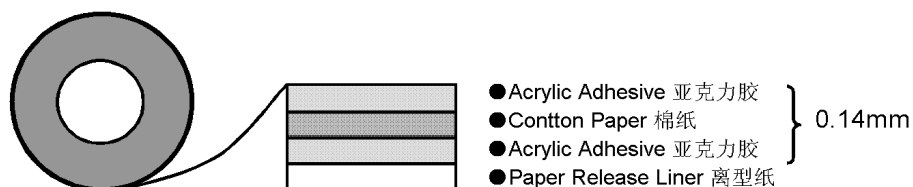

#### ● Technical Data: 特性

Test Item 测试项目	Unit 单位	Value 数值	Test Method 测试方法
Thickness 厚度	mm	0.14±0.02	—
Initial Adhesion 初粘力	-	> 12#	GB/T4852, Ball tack. J.dow method at room temperature. Tape size: 100mm*150mm. 初粘, 在室温下用J.dow方法; 测试尺寸: 100mm *150mm
180° Peel Adhesion 180°剥离力	gf/25mm	2500	180° peel strength to substrate at room temperature (30 min) 室温下放置30min后180° 对基板剥离
Holding Power 保持力	hrs	> 120	GB/7754, Tensile strength, tape size: 25mm*25mm, loading: 1kg. 测试尺寸: 25mm*25mm, 荷重: 1kg
Temperature Resistance 耐温性	--	-20°C~120°C	—
Color 颜色	White 白色		—
Release Liner 离型膜	Paper Liner 离型纸		—
Product Size 产品尺寸	1.05m*50m		—

●Shelf Life & Storage

Conditions :

存储方式与保质期

Tape in roll form: Shelf life 12 months from the date of manufacture when stored in original cartons at 20°C and 50% relative humidity.

成卷胶带：原箱储存在20°C、50%的相对湿度条件下，从制造之日起保质12个月。

Ideal tape application temperature range is 21°C to 38°C.

胶带最佳适用范围为21°C-38°C。

---

**Notes:** The information contained in this data sheet is intended to assist you in designing with Incheng products. The technical information and data should be considered representative or typical only. It is not intended to and does not create any warranties, express or implied, including any warranty of merchantability or fitness for particular purpose or that the results shown on this data sheet will be achieved by user for a particular purpose. The user should determine the suitability of Incheng products for each application.

注释：本文件中所包含的产品信息旨在协助您使用仁诚化学产品、并为设计与应用提供参考。该技术信息和数据只应被考虑具有代表性或典型性，并非为产品所作的任何明示或暗示的保证，包括但不限于任何适销性或针对特定用途的适用性。本技术文件所展示的数据结论是针对特定用途的使用者，用户应自行确定仁诚化学产品的适用性。

---

深圳仁盛化成材料技术有限公司

Incheng Chemical Co., Ltd



Tel: (+86)755-86962203

Fax: (+86)20-38892205

www.incheng.net