

### 3303HC PET Film Double-Sided Tape

#### Technical Data

- Product Description** It uses thin layer of PET film as base material,transparent colloform.Excellent function with steel and plastic surface and good adhesion to PU foam.

---


- Key Features**
  - Very low thickness of only 30μm.
  - High adhesion level relative to low thickness.
  - Easy application to a curved surface.
  - Excellent resistance to demanding environmental conditions.
  - Excellent handling performance in converting processes.

---

- Application Ideas**
  - Used for mounting of metal or plastic badges and sings.
  - Fixing of reflection foil to LCD frame
  - Splicing of thin plastic films

---

- Construction**

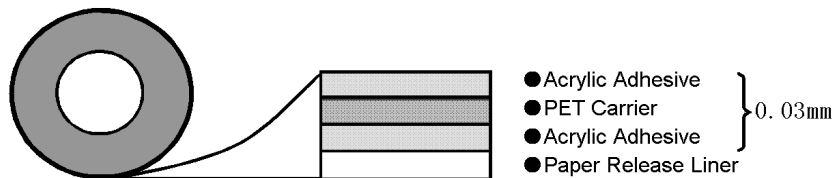

#### • Technical Data

Test Item	Unit	Value	Test Method	
Thickness	mm	0.03		
Initial Adhesion	Ball No.	5#~6#	GB/T4852,Ball tack. J.dow method at room temperature. Tape size: 100mm*150mm.	
180° Peel Adhesion	SUS (30 min)	kgf/25mm	GB/T2792,180°peel strength to substrate at room temperature,tape size:25mm*150mm	
	SUS (72 hr)			1.90
	PET (30 min)			1.30
	PET (72 hr)			1.80
Holding Power	SUS	hrs	GB/7754,Tensile strength, tape size:25mm*25mm, loading: 1kg	
	PET	hrs		>12
Color	Transparent		-	
Release Liner	120g white paper Liner		GB/T2792	

• <b>Standard size</b>	1040mm×100m	
• <b>Envirument Resistance</b>	Temperature Resistance	-10°C~100°C
	Humidity Resistance	Very Good
	Solvent Resistance	Very Good
	UV Resistance	Very Good
• <b>Shelf Life &amp; Storage Conditions</b>	Tape in roll form: Shelf life 12 months from the date of manufacture when stored in original cartons at 20°C and 50% relative humidity. Ideal tape application temperature range is 21°C to 38°C.	

**Notes:** The information contained in this data sheet is intended to assist you in designing with Incheng adhesive tape. The technical information and datas should be considered representative or typical only. It is not intended to and does not create any warranties, express or implied, including any warranty of merchantability or fitness for particular purpose or that the results shown on this data sheet will be achieved by user for a particular purpose. The user should determine the suitability of Incheng adhesive tape for each application.

深圳仁盛化成材料技术有限公司

Incheng Chemical Co., Ltd



Tel: (+86)755-86962203

Fax: (+86)20-38892205

www.incheng.net