

3308HM

PET Film Double-Sided Tape

Technical Data

- Product Description**

3308HM is a clear double side self-adhesive tape consisting of a thin PET carrier and resin adhesive.


- Key Features**

Very low acid.
 High bonding strength.
 Very good adhesion to most common smooth substrate.
 Good performance in temperature and chemical resistance.
 Good handling performance in converting processes.

- Application Ideas**

Used for variety substrate bonding, such as metal panel, plastic and films.
 Ideal for graphic overlays, nameplates, appliques and decorative trim.
 Good for mobile phone parts attachment, such as gasket, mesh, insulation films.
 Good for LCD BLU mounting.
 Good for battery pack mounting

- Construction**

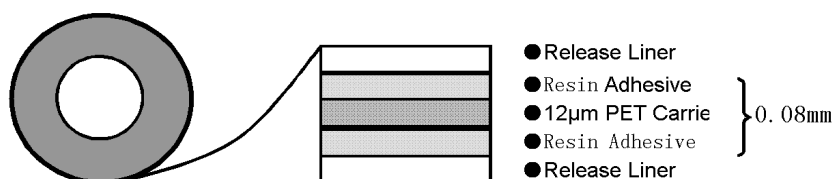

• Technical Data

Test Item	Unit	Value	Test Method
Thickness	mm	0.08	—
Initial Adhesion	Ball No.	6#~7#	GB/T4852, Ball tack. J.dow method at room temperature. Tape size: 100mm*150mm.
180° Peel Adhesion	kgf/25mm	2.0	GB/T2792, 180° peel strength to SUS substrate at room temperature, tape size: 25mm*150mm
Holding Power	hrs	>48	GB/7754, Tensile strength, tape size: 25mm*25mm, loading: 2kg to SUS substrate
Color	Clear		—
Dianions Value	ppm	<7	—
pH	—	>6	—
Heat Resistant	—	80°C*30min	—
Weather Resistance	—	Normal	—
Release Liner	50um Yellow & White Paper/50um Transparent Film		

• **Envirument
Resistance**

Temperature Resistance -10°C~100°C

Weather Resistance Normal

• **Shelf Life & Storage
Conditions**

Tape in roll form: Shelf life 12 months from the date of manufacture when stored in original cartons at 20°C and 50% relative humidity.

Ideal tape application temperature range is 21°C to 38°C.

Notes: The information contained in this data sheet is intended to assist you in designing with Incheng adhesive tape. The technical information and datas should be considered representative or typical only. It is not intended to and does not create any warranties, express or implied, including any warranty of merchantability or fitness for particular purpose or that the results shown on this data sheet will be achieved by user for a particular purpose. The user should determine the suitability of Incheng adhesive tape for each application.

深圳仁盛化成材料技术有限公司

Incheng Chemical Co., Ltd



Tel: (+86)755-86962203

Fax: (+86)20-38892205

www.incheng.net