

3308LA

PET Film Double-Sided Tape

PET双面胶带

Technical Data: 产品说明书

• Product

3308LA is a clear double side self-adhesive tape consisting of a thin PET carrier and modified acrylic adhesive with low acid.

Description :

产品介绍

3308LA是一款由薄的PET基材和低酸性改性亚克力胶制成的透明双面自粘性胶带。

• Key Features :

特点

Low acid.

具有低酸性。

High bonding strength.

具有高粘接强度。

Very good adhesion to most common smooth substrate.

对于大多数的光滑表面都有很好的粘性。

Good performance in temperature and chemical resistance.

具有很好的耐温性和耐化学性。

Good handling performance in converting processes.

各类制程中使用，操作性能好。

• Application Ideas :

应用

Used for variety substrate bonding, such as metal panel, plastic and films.

可以用于粘结金属板，塑料和各类膜材。

Ideal for graphic overlays, nameplates, appliques and decorative trim.

可用于柔性薄膜开关，铭牌，贴花和装饰性剪裁上面。

Good for mobile phone parts attachment, such as gasket, mesh, insulation films.

可以很好粘接各类手机零部件，例如垫圈，防尘网和绝缘膜等。

Good for LCD BLU mounting and R-TP ITO film bonding.


用于LCD背光模组装配和电阻触摸屏ITO膜粘接。

Good for battery pack mounting.

用于电池组装配。

• Construction :

结构

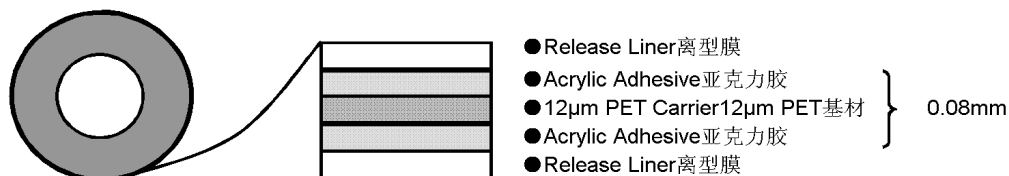

• Technical Data : 特性

Test Item 测试项目	Unit 单位	Value 数值	Test Method 测试方法
Thickness 厚度	mm	0.08	—
Initial Adhesion 初粘力	Ball No.	6#~7#	GB/T4852, Ball tack. J.dow method at room temperature. Tape size: 100mm*150mm. 初粘，在室温下用J.dow方法；测试尺寸：100mm *150mm
180° Peel Adhesion 180°剥离力	kgf/25mm	1.40	GB/T2792, 180° peel strength to SUS substrate at room temperature, tape size: 25mm*150mm 室温下180°对不锈钢基板剥离；测试尺寸：25mm×150mm

Test Item 测试项目	Unit 单位	Value 数值	Test Method 测试方法
Holding Power 保持力	hrs	>48	GB/7754, Tensile strength, tape size:25mm*25mm, loading: 2kg to SUS substrate 测试尺寸: 25mm×25mm, 荷重: 2kg, 对不锈钢基材
Color 颜色	Clear 透明		—
Dianions Value 二价阴离子数	ppm	<7	—
pH	—	6	—
Heat Resistant 耐热性	—	100°C*30min	—
Weather Resistance 耐候性	—	Normal 一般	—
Release Liner 离型膜	75um Blue Film/38um Transparent Film 75 um蓝色膜/38 um透明膜		

• **Envirument**

Resistance :

环境耐候性

Temperature Resistance

耐温性

-10°C~100°C

Weather Resistance

耐候性

Normal

一般

• **Shelf Life & Storage**

Conditions :

存储方式与保质期

Tape in roll form: Shelf life 12 months from the date of manufacture when stored in original cartons at 20°C and 50% relative humidity.

成卷胶带: 原箱储存在20°C、50%的相对湿度条件下, 从制造之日起保质12个月。

Ideal tape application temperature range is 21°C to 38°C.

胶带最佳适用范围为21°C-38°C。

Notes: The information contained in this data sheet is intended to assist you in designing with Incheng products. The technical information and datas should be considered representative or typical only. It is not intended to and does not create any warranties, express or implied, including any warranty of merchantability or fitness for particular purpose or that the results shown on this data sheet will be achieved by user for a particular purpose. The user should determine the suitability of Incheng products for each application.

注释: 本文件中所包含的产品信息旨在协助您使用仁诚化学产品, 并为设计与应用提供参考。该技术信息和数据只应被考虑具有代表性或典型性, 并非为产品所作的任何明示或暗示的保证, 包括但不限于任何适销性或针对特定用途的适用性。本技术文件所展示的数据结论是针对特定用途的使用者, 用户应自行确定仁诚化学产品的适用性。

深圳仁盛化成材料技术有限公司

Incheng Chemical Co., Ltd



Tel: (+86)755-86962203

Fax: (+86)20-38892205

www.incheng.net