

3310BW

Black White Double-sided Tape

黑白双面胶带

Technical Data: 产品说明书

● Key Features :

特点

White/Black Polyester Film for very good light-shielding and reflection.

黑/白聚酯膜具有很好的遮光和反射效果。

Acrylic adhesive have excellent bonding performance to various plastics materials.

双面亚克力胶对于各类塑料材料都有极好的粘性。

● Application Ideas :


应用

Suitable for excellent fixing of Blacklight unit and LCD panel and LCD Module.

可用于极好的固定住遮光单元、LCD板和LCD模块。

● Construction :

结构

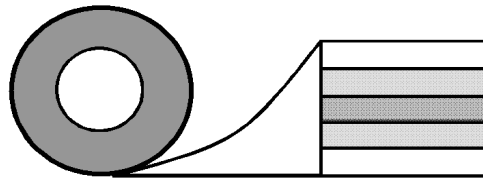

●Release Liner 75µm离型膜75 µ m

●Acrylic Adhesive亚克力胶

●White/Black Film黑/白膜

●Acrylic Adhesive亚克力胶

●Release Liner 25µm离型膜25µm

● Technical Data : 特性

Test Item 测试项目		Unit 单位	Value 数值	Test Method 测试方法
Thickness 厚度	White Side白面	mm	0.020±0.002	—
	Black Side黑面		0.015±0.002	
	Total总厚度		0.100±0.005	
180° Peel Adhesion 180°剥离力	White Side白面	kgf/25mm	2.1	GB/T2792, 180° peel strength to substrate at room temperature, tape size: 25mm*150mm. 室温下180°对基板剥离; 测试尺寸: 25mm×150mm
	Black Side黑面		1.8	
Holding Power 保持力		hrs	>24	GB/7754, Tensile strength, tape size: 25mm*25mm, loading: 1kg. 测试尺寸: 25mm×25mm, 荷重: 1kg。
Color 颜色		Black/White 黑/白		—
Release Liner Adhesion 离型膜粘力	#75µm	gf/25mm	30±5	GB/T2792
	#25µm		10±5	
Reflectance 反射比		%	76	(550nm) JY/T022-1996
Transmittance 透射比		%	0.01	(550nm) JY/T022-1996

● Shelf Life & Storage

Conditions :

存储方式与保质期

Tape in roll form: Shelf life 12 months from the date of manufacture when stored in original cartons at 20°C and 50% relative humidity.

成卷胶带: 原箱储存在20°C、50%的相对湿度条件下, 从制造之日起保质12个月。

Ideal tape application temperature range is 21°C to 38°C.

胶带最佳适用范围为21°C-38°C。

Notes: The information contained in this data sheet is intended to assist you in designing with Incheng products. The technical information and data should be considered representative or typical only. It is not intended to and does not create any warranties, express or implied, including any warranty of merchantability or fitness for particular purpose or that the results shown on this data sheet will be achieved by user for a particular purpose. The user should determine the suitability of Incheng products for each application.

注释：本文件中所包含的产品信息旨在协助您使用仁诚化学产品、并为设计与应用提供参考。该技术信息和数据只应考虑具有代表性或典型性，并非为产品所作的任何明示或暗示的保证，包括但不限于任何适销性或针对特定用途的适用性。本技术文件所展示的数据结论是针对特定用途的使用者，用户应自行确定仁诚化学产品的适用性。

深圳仁盛化成材料技术有限公司

Incheng Chemical Co., Ltd



Tel: (+86)755-86962203

Fax: (+86)20-38892205

www.incheng.net