


AB130

AB Double-Side Tape

Technical Data

- Product Description** AB130 is a double side adhesive tape consisting of PET carrier, modified acrylic adhesive on one side and silicone adhesive on another side .
- Key Features**
 - Good performance in adhesive force.
 - Strong holding force.
 - No residual adhesive left.
- Application Ideas** Used for bonding silicone rubber parts or panels such as mobile phone keypad.
- Construction**

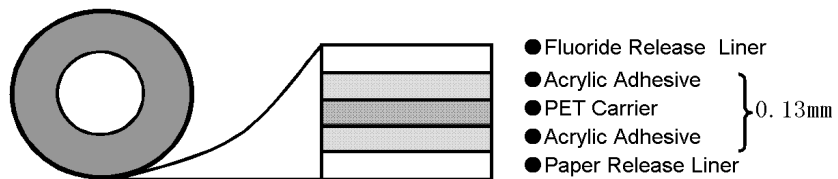

Technical Data

Test Item		Unit	Value	Test Method
Thickness	Carrier Film	mm	0.025	GB7125-1999
	Total		0.13	
180° Peel Adhesion	Silicone	N /25mm	10±0.5	GB/T72792-1998
	Acrylic		15±0.5	
Tensile Strength		N/cm ²	135	GB7753-1987
Elongation		%	75	GB7753-1987
Release Liner		Fluoride Release Flim / Paper Release Paper		

Shelf Life & Storage Conditions

Tape in roll form: Shelf life 12 months from the date of manufacture when stored in original cartons at 20°C and 50% relative humidity.

Ideal tape application temperature range is 21°C to 38°C.

Notes: The information contained in this data sheet is intended to assist you in designing with Incheng adhesive tape. The technical information and data should be considered representative or typical only. It is not intended to and does not create any warranties, express or implied, including any warranty of merchantability or fitness for particular purpose or that the results shown on this data sheet will be achieved by user for a particular purpose. The user should determine the suitability of Incheng adhesive tape for each application.

深圳仁盛化成材料技术有限公司
Incheng Chemical Co., Ltd

Tel: (+86)755-86962203
Fax: (+86)20-38892205
www.incheng.net