

LS5005AS

PET Anti-static Protective Film

PET防静电保护膜

Technical Data : 产品说明书

● Product Description


: 产品介绍

It is a PET protective film with silicone adhesive single coated . Covering in very wide variety of sensitive surface against dirt, dust and scratch damage happened during converting processing, storage and mounting etc, including plastic,polarizing film, PMMA, PC and glass etc many surface.

此款保护膜以PET为基材，单面涂覆硅胶，具有防静电处理层。在产品的加工、安装、存储和运输过程中，能起到有效的防尘、防污和防刮伤效果；产品适用于塑料、偏光膜片、亚克力、PC、玻璃等各种表面。

● Construction :

结构

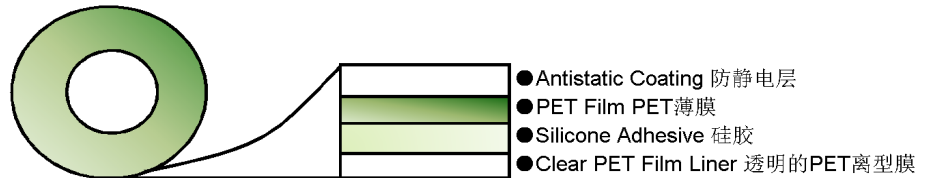

● Technical Data : 特性

Test Item 测试项目		Unit 单位	Value 数值	Test Method 测试方法
Thickness 厚度	PET Film PET薄膜	μm	50	/
	Adhesive 胶粘剂	μm	8~10	/
	Liner 离型膜	μm	36	/
Peel Force 剥离力		g/inch	6±2	ASTM D-3330, To Polycarbonate, 180° Peel. 对PC, 180°剥离。
Surface resistance 表面电阻		Ω·cm	10 ⁸ -10 ¹¹	Surface resistivity tester 表面电阻测试仪
Temperature Resistance 耐温性		hrs	12 (120℃)	/
Color 颜色			Transparent 透明	

● Shelf Life & Storage

Conditions :

存储方式与保质期

Shelf life 6 months from the date of manufacture when stored in original cartons at 18-25℃ and 30-75% relative humidity.

18-25℃、30-75%的相对湿度条件下，原箱储存，从制造之日起保质6个月。

Notes: The information contained in this data sheet is intended to assist you in designing with Incheng products. The technical information and datas should be considered representative or typical only. It is not intended to and does not create any warranties, express or implied, including any warranty of merchantability or fitness for particular purpose or that the results shown on this data sheet will be achieved by user for a particular purpose. The user should determine the suitability of Incheng products for each application.

注释：本文件中所包含的产品信息旨在协助您使用仁诚化学产品、并为设计与应用时提供参考。该技术信息和数据只应被考虑具有代表性或典型性，并非为产品所作的任何明示或暗示的保证，包括但不限于任何适用性或针对特定用途的适用性，本技术文件所展示的数据结论是针对特定用途的使用者。用户应自行确定仁诚化学产品的适用性。

深圳仁盛化成材料技术有限公司

Incheng Chemical Co., Ltd



Tel: (+86)755-86962203

Fax: (+86)20-38892205

www.incheng.net