


**PBA5010**
**Anti-static PE Protective Film**
**Technical Data**

- Product Description**

It uses Anti-static PE film as base material, with acrylic adhesive on one side coated.

- Construction**

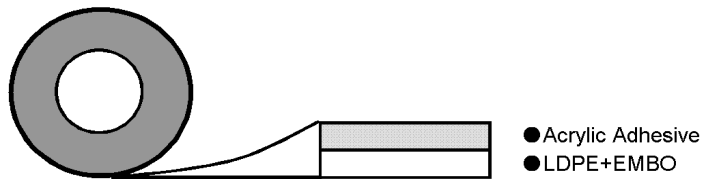

- Technical Data**

Test Item	Unit	Value	Test Method
Thickness	mm	0.050±0.005	—
180° Peel Adhesion	gf/25mm	10±3	180° peel strength to substrate at room temperature, tape size: 25mm*150mm
Function(anti-static coefficient)	Ω	10 <sup>8</sup> -10 <sup>11</sup>	—
Tensile strength (MD)	kgf/10cm <sup>2</sup>	> 150	—
Elongation(MD)	%	>200	—
Color	Transparent		—

- Shelf Life & Storage Conditions**

Tape in roll form: Shelf life 3 months when stored in original cartons at 18~25°C and below 50% relative humidity.

**Notes:** The information contained in this data sheet is intended to assist you in designing with Incheng products. The technical information and datas should be considered representative or typical only. It is not intended to and does not create any warranties, express or implied, including any warranty of merchantability or fitness for particular purpose or that the results shown on this data sheet will be achieved by user for a particular purpose. The user should determine the suitability of Incheng adhesive tape for each application.

深圳仁盛化成材料技术有限公司

Incheng Chemical Co., Ltd


 Tel: (+86)755-86962203  
 Fax: (+86)20-38892205  
 www.incheng.net