

## SJ0603B

### PE Foam Double-Sided Tape

#### Technical Data

- **Product Description** SJ0603B used layer of the Close Cell PE Foam as base material, and coated with adhesive on both sides.

---


- **Key Features**
  - Good at concave surface adhesion.
  - Good mitigate vibratility .
  - Strong crack resistance.
  - Good adhesion and waterproof.
  - Excellent function with steel panel and plastic panel.

---

- **Application Ideas**
  - Excellent sticky with logo plate and electrical products.

---

- **Construction**

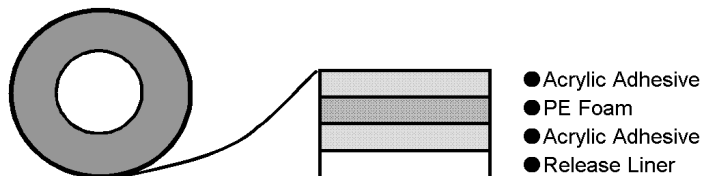

#### ● Technical Data

Test Item	Unit	Value	Test Method
Thickness	mm	0.32	ASTM 1000
Initial Adhesion	ball size	>9#	GB/T4852, Ball tack. J.dow method at room temperature. Tape size: 100mm*150mm.
180° Peel Adhesion	N/25mm	>18	GB/T2792, 180° peel strength to substrate at room temperature, tape size: 10mm*150mm
Holding Power	Hr	>24	GB/7754, Tensile strength, tape size: 25mm*25mm, loading: 1kg
Temperature Resistance	°C	-20~80	—
Color	Black		—
Release Liner	120g white paper Liner		—

#### ● Shelf Life & Storage Conditions

Tape in roll form: Shelf life 12 months from the date of manufacture when stored in original cartons at 20°C and 50% relative humidity.  
 Ideal tape application temperature range is 21°C to 38°C.

**Notes:** The information contained in this data sheet is intended to assist you in designing with Incheng adhesive tape. The technical information and datas should be considered representative or typical only. It is not intended to and does not create any warranties, express or implied, including any warranty of merchantability or fitness for particular purpose or that the results shown on this data sheet will be achieved by user for a particular purpose. The user should determine the suitability of Incheng adhesive tape for each application.

---

深圳仁盛化成材料技术有限公司

Incheng Chemical Co., Ltd



Tel: (+86)755-86962203

Fax: (+86)20-38892205

[www.incheng.net](http://www.incheng.net)