

SJ0608B

PE Foam Double-Sided Tape

Technical Data

• Product Description

SJ0608B used PE Foam as base material, and coated with adhesive on both sides.

• Key Features

Excellent initial adhesion.

Good sealing.

Good shock absorption.

Good adhesion and waterproof;

Good at concave surface adhesion.


Halogen free & RoHS (environmental protection) standard.

• Application Ideas

Suitable for Mobile Phone internal part, module, case and LENS bonding.

Excellent function with steel panel and plastic panel

• Construction

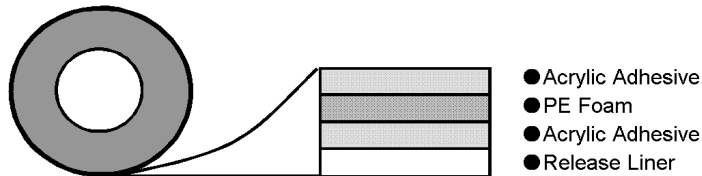

• Technical Data

Test Item		Unit	Value	Test Method
Thickness	Base material	mm	0.40	—
	Total		0.8	
Density		kg/m ³	166	—
Initial Adhesion		Ball No.	> 10#	GB/T4852, Ball tack. J. dow method at room temperature. Tape size: 100mm*150mm.
180° Peel Adhesion		kgf/25mm	> 2.8	GB/T2792, 180° peel strength to substrate at room temperature, tape size: 10mm*150mm
Holding Power		Hr	> 24	GB/7754, Tensile strength, tape size: 25mm*25mm, loading: 1kg
Temperature Resistance		°C	-20~80	—
Color		Black		—
Release Liner		120g white paper Liner		—

**•Shelf Life & Storage
Conditions**

Tape in roll form: Shelf life 12 months from the date of manufacture when stored in original cartons at 20°C and 50% relative humidity.

Ideal tape application temperature range is 21°C to 38°C.

Notes: The information contained in this data sheet is intended to assist you in designing with Incheng adhesive tape. The technical information and data should be considered representative or typical only. It is not intended to and does not create any warranties, express or implied, including any warranty of merchantability or fitness for particular purpose or that the results shown on this data sheet will be achieved by user for a particular purpose. The user should determine the suitability of Incheng adhesive tape for each application.

深圳仁盛化成材料技术有限公司

Incheng Chemical Co., Ltd



Tel: (+86)755-86962203

Fax: (+86)20-38892205

www.incheng.net